


DIMENSION FLANGES - ASME B16.47 SERIE B

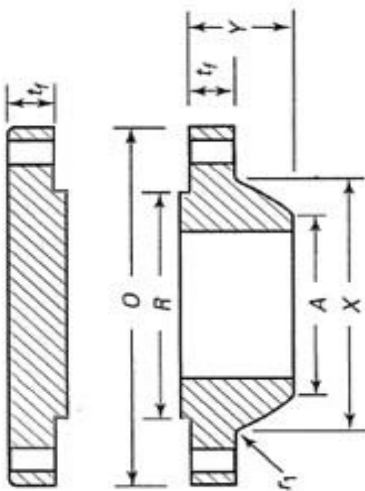

DN	NPS	O.D. OF FLANGE O [mm]	MINIMUM THICKNESS OF FLANGE TF [mm] WNF	MINIMUM THICKNESS OF FLANGE TF [mm] BLIND	LENGTH HUB THROUGH HUB Y [mm]	RAISED FACE DIAM. . R [mm]	HUB DIAM. TOP. A [mm]	DIAM. OF HUB. X [mm]	NUMBER OF BOLT HOLES	DIAM. OF BOLT D [in]	WEIGHT WN	WEIGHT BLIND
650	26"	785	39.8	43.0	87	711	661.9	684	36	3/4"	61	177
700	28"	835	43.0	46.2	94	762	712.7	735	40	3/4"	70.3	214
750	30"	885	43.0	49.3	98	813	763.5	787	44	3/4"	76.6	256
800	32"	940	44.6	52.5	106	864	814.3	840	48	3/4"	87.6	304
850	34"	1005	47.7	55.7	109	921	865.1	892	40	7/8"	106	367
900	36"	1055	50.9	57.3	116	972	915.9	945	44	7/8"	120	417
950	38"	1125	52.5	62.0	122	1022	968.2	997	40	1"	144	507
1000	40"	1175	54.1	65.2	127	1080	1019.0	1049	44	1"	156	579
1050	42"	1225	57.3	66.8	132	1130	1069.8	1102	48	1"	172	647
1100	44"	1275	58.9	70.0	135	1181	1120.6	1153	52	1"	184	732
1150	46"	1340	60.4	73.1	143	1235	1171.4	1205	40	1-1/8"	216	846
1200	48"	1390	63.6	76.3	148	1289	1222.2	1257	44	1-1/8"	235	946
1250	50"	1445	66.8	79.5	152	1340	1273.0	1308	48	1-1/8"	369	899
1300	52"	1495	68.4	82.7	156	1391	1323.8	1360	52	1-1/8"	269	1175
1350	54"	1550	70.0	85.8	160	1441	1374.6	1413	56	1-1/8"	293	1312
1400	56"	1600	71.6	89.0	165	1492	1425.4	1465	60	1-1/8"	311	1445
1450	58"	1675	73.1	91.9	173	1543	1476.2	1516	48	1-1/4"	372	1640
1500	60"	1725	74.7	95.4	178	1600	1527.0	1570	52	1-1/4"	394	1799