


DIMENSION FLANGES - ASME B16.47 SERIE B

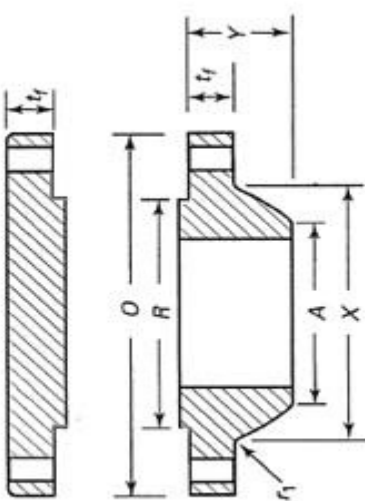

DN	NPS	O.D. OF FLANGE O [mm]	MINIMUM THICKNESS OF FLANGE TF [mm] WNF	MINIMUM THICKNESS OF FLANGE TF [mm] BLIND	LENGTH HUB THROUGH HUB Y [mm]	RAISED FACE DIAM. . R[mm]	HUB DIAM. TOP; A [mm]	DIAM. OF HUB, X [mm]	NUMBER OF BOLT HOLES	DIAM. OF BOLT D [in]	WEIGHT WN	WEIGHT BLIND
650	26"	890	111.2	111.3	181	727	660.4	698	28	1-5/8"	251	534
700	28"	950	115.9	115.9	190	784	711.2	752	28	1-3/4"	294	636
750	30"	1020	125.5	127.0	205	841	762.0	806	28	1-7/8"	366	801
800	32"	1085	130.2	134.9	216	895	812.8	860	28	2"	423	958
850	34"	1160	141.3	144.2	233	953	863.6	914	24	2-1/4"	534	1174
900	36"	1215	146.1	150.9	243	1010	914.4	968	28	2-1/4"	574	1330
950	38"	-	-	-	-	-	-	-	-	-	-	-
1000	40"	-	-	-	-	-	-	-	-	-	-	-
1050	42"	-	-	-	-	-	-	-	-	-	-	-
1100	44"	-	-	-	-	-	-	-	-	-	-	-
1150	46"	-	-	-	-	-	-	-	-	-	-	-
1200	48"	-	-	-	-	-	-	-	-	-	-	-
1250	50"	-	-	-	-	-	-	-	-	-	-	-
1300	52"	-	-	-	-	-	-	-	-	-	-	-
1350	54"	-	-	-	-	-	-	-	-	-	-	-
1400	56"	-	-	-	-	-	-	-	-	-	-	-
1450	58"	-	-	-	-	-	-	-	-	-	-	-
1500	60"	-	-	-	-	-	-	-	-	-	-	-