


DIMENSION FLANGES - ASME B16.47 SERIE B

5
Flanges /
Connectors

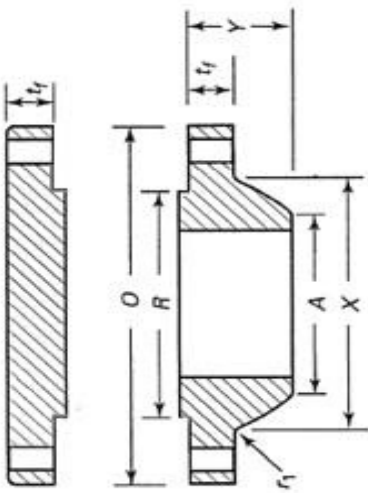

DN	NPS	O.D. OF FLANGE O [mm]	MINIMUM THICKNESS OF FLANGE TF [mm] WNF	MINIMUM THICKNESS OF FLANGE TF [mm] BLIND	LENGTH THROUGH HUB Y [mm]	RAISED FACE DIAM. . R[mm]	HUB DIAM. TOP. A [mm]	DIAM. OF HUB. X [mm]	NUMBER OF BOLT HOLES	DIAM. OF BOLT D [in]	WEIGHT WN	WEIGHT BLIND
650	26"	1020	135.0	154.0	259	762	660.4	743	20	2-1/2"	527	942
700	28"	1105	147.7	166.7	276	819	711.2	797	20	2-3/4"	662	1183
750	30"	1180	155.6	176.1	289	876	762.0	851	20	3"	784	1423
800	32"	1240	160.4	186.0	303	927	812.8	908	20	3"	882	1662
850	34"	1315	171.5	195.0	319	991	863.6	962	20	3-1/4"	1044	1958
900	36"	1345	173.1	201.7	325	1029	914.4	1016	24	3"	1057	2128
950	38"	-	-	-	-	-	-	-	-	-	-	-
1000	40"	-	-	-	-	-	-	-	-	-	-	-
1050	42"	-	-	-	-	-	-	-	-	-	-	-
1100	44"	-	-	-	-	-	-	-	-	-	-	-
1150	46"	-	-	-	-	-	-	-	-	-	-	-
1200	48"	-	-	-	-	-	-	-	-	-	-	-
1250	50"	-	-	-	-	-	-	-	-	-	-	-
1300	52"	-	-	-	-	-	-	-	-	-	-	-
1350	54"	-	-	-	-	-	-	-	-	-	-	-
1400	56"	-	-	-	-	-	-	-	-	-	-	-
1450	58"	-	-	-	-	-	-	-	-	-	-	-
1500	60"	-	-	-	-	-	-	-	-	-	-	-