


COMPACT FLANGES SEALRINGS NORSOK L-005 EDITION 2, MAY 2006

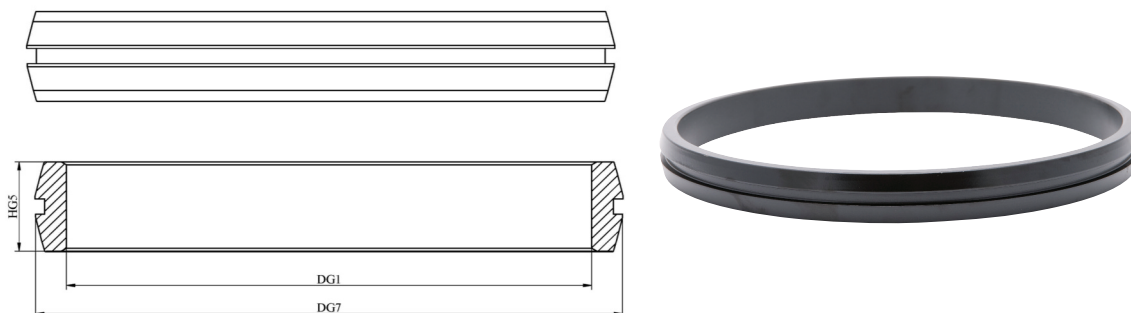

DN	NPS (inch)	IX size	DG1 mm	DG7 mm	HG5 mm	WEIGHT kg
15	1/2"	IX15	22,2	30,19	10	0,02
20	3/4"	IX20	27,2	35,2	10	0,03
25	1"	IX25	34,2	42,22	10	0,03
40	1 1/2"	IX40	49,3	58,21	10,56	0,05
50	2"	IX50	61,3	71,13	11,78	0,08
65	2 1/2"	IX65	74,4	85,05	12,98	0,12
80	3"	IX80	89,5	100,96	14,24	0,17
100	4"	IX100	115,7	128,85	16,19	0,28
125	5"	IX125	142	156,75	17,94	0,42
150	6"	IX150	170,2	186,66	19,64	0,62
200	8"	IX200	220,5	238,54	22,36	0,99
250	10"	IX250	274,9	298,42	25,2	1,85
300	12"	IX300	325	347,36	27,15	2,18
350	14"	IX350	357,1	380,32	28,46	2,60
400	16"	IX400	409,3	434,27	30,47	3,43
450	18"	IX450	459,4	486,23	32,28	4,38
500	20"	IX500	511,6	539,2	34,06	5,27
550	22"	IX550	561,7	591,18	35,69	6,48
600	24"	IX600	611,9	642,16	37,25	7,55
700	28"	IX700	714,1	747,16	40,25	10,40
750	30"	IX750	766,3	800,16	41,69	11,80
800	32"	IX800	816,4	851,16	43,03	13,30
850	34"	IX850	866,6	902,18	44,34	14,80
900	36"	IX900	918,7	956,19	45,65	17,10
950	38"	IX950	968,8	1007,21	46,88	18,90
1000	40"	IX1000	1021,0	1060,23	48,12	20,90
1050	42"	IX1050	1071,1	1111,26	49,29	23,00
1100	44"	IX1100	1121,3	1162,28	50,43	25,10
1150	46"	IX1150	1173,4	1215,31	51,59	27,50
1200	48"	IX1200	1223,6	1266,35	52,68	29,90